


MONO



Powerguard Insurance
Global Coverage

The power output shall not be less than 96.5% of the minimum power output stated in the product data sheet in the first year of the product's life cycle. The loss of power output shall not exceed 0.68% per year thereafter, ending with 80.18% in the 25th year.

■ CSUN ■ Standard Warranty

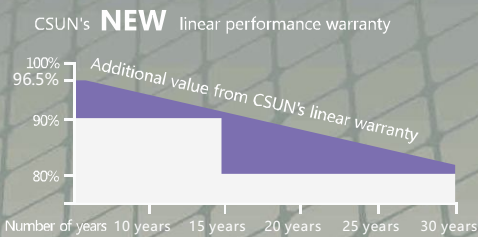

CSUN310-60M-DG

The Large Scale Project Solution

CSUN310-60M-DG CSUN305-60M-DG
CSUN300-60M-DG CSUN295-60M-DG
CSUN290-60M-DG

18.69%
Module efficiency

310W
Highest power output

15 years
Material & Workmanship warranty

30 years
Linear power output warranty



PID-free



World class mono efficiency



Tighter product performance distribution and current sorting reduces the mismatch power loss in system operation



Positive tolerance offer



Good temperature coefficient enables higher output in high temperature regions



Excellent performance under low light conditions



Certified for salt/ammonia corrosion resistance



Load certificates: wind to 2400Pa and snow to 5400Pa

- China Sunergy Co., Ltd. designs, manufactures and delivers high efficient solar cells and modules to the world from its production centers based in China, Turkey, South Korea and Vietnam.
- Founded in 2004, China Sunergy is well known for its advanced solar cell technology reliable product quality and excellent customer service.
- As one of leading PV enterprises, China Sunergy has delivered more than 4.0GW of solar products to residential, commercial, utility and off-grid projects all around the world.

- Note:
All specifications, warranties, certifications about module of "CSUN" series also apply to that of "SST".

All information and data are subject to change without notice.

Right 2017



Electrical characteristics at Standard Test Conditions(STC)

Module Type	CSUN310-60M-DG	CSUN305-60M-DG	CSUN300-60M-DG	CSUN295-60M-DG	CSUN290-60M-DG
Maximum Power - Pmax (W)	310	305	300	295	290
Open Circuit Voltage - Voc (V)	40.0	39.9	39.8	39.6	39.5
Short Circuit Current - Isc (A)	9.81	9.72	9.6	9.54	9.47
Maximum Power Voltage - Vmpp (V)	32.6	32.4	32.2	32	31.9
Maximum Power Current - Impp (A)	9.52	9.42	9.31	9.22	9.1
Module Efficiency	18.69	18.38%	18.08%	17.78%	17.48%

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1.5; module temperature 25°C. Tolerance of Pmp: 0~+3%.

Measuring uncertainty of power: ±3%. Certified in accordance with IEC 61215, IEC 61730-1/2 and UL 1703.

Electrical Characteristics at Normal Operating Cell Temperature(NOCT)

Module Type	CSUN310-60M-DG	CSUN305-60M-DG	CSUN300-60M-DG	CSUN295-60M-DG	CSUN290-60M-DG
Maximum Power - Pmax (W)	233	229	225	220	216
Open Circuit Voltage - Voc (V)	37.5	37.4	37.3	37	36.9
Short Circuit Current - Isc (A)	7.95	7.84	7.74	7.69	7.64
Maximum Power Voltage - Vmpp (V)	31.3	31.1	30.9	30.6	30.3
Maximum Power Current - Impp (A)	7.47	7.38	7.28	7.22	7.14

Normal Operating Cell Temperature(NOCT) : irradiance 800W/m²; wind speed 1 m/s ; cell temperature 45°C; ambient temperature 20°C.

Measuring uncertainty of power: ±3%. Certified in accordance with IEC 61215, IEC 61730-1/2 and UL 1703.

Temperature Characteristics

Maximum Ratings

NOCT	45°C (±2°C)	Maximum System Voltage [V]	1000
Voltage Temperature Coefficient	-0.29%/K	Series Fuse Rating [A]	20
Current Temperature Coefficient	+0.05%/K		
Power Temperature Coefficient	-0.39%/K		

Material Characteristics

Dimensions	1664×998×40mm (L×W×H)
Weight	25.4kg
Frame	Composition
Front Glass	High transparency,Antireflection coated,Semi-toughened safety glass,2.5mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate),transparent or white
Back Glass	Semi-toughened safety glass,2.5mm
Cells	6×10 pieces monocrystalline solar cells series strings (156mm×156mm)
Junction Box	Rated current≥13A, IP≥67, TUV
Cable&Connector	Length 500mm, 1×4 mm ² , compatible with MC4


Packaging

System Design

Dimensions(L×W×H)	1690×1120×1100mm	Temperature Range	-40 °C to + 85 °C
Container 20'	312	Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m/s
Container 40'	728	Maximum Surface Load	5,400 Pa
Container 40'HC	784	Application class	class A
		Safety class	class II

Dimensions


Note:mm (inch)

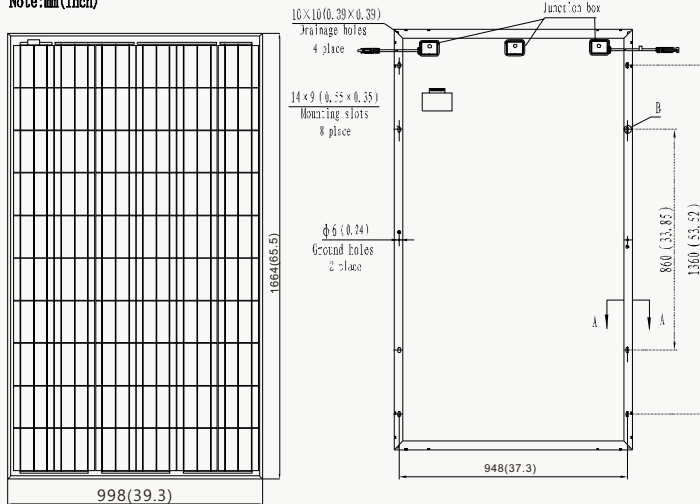

FRONT VIEW

BACK VIEW

IV-Curves

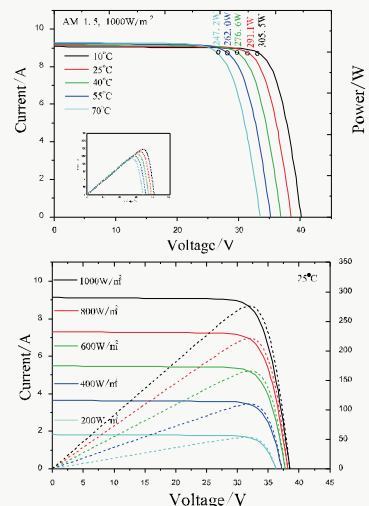

Excellent performance under weak light condition.